

| Standard executions | | | |
|------------------------------------|--------|--------|--------|
| Version | Symbol | Code | Item |
| 5/2 pilot/spring | | 034117 | A1P450 |
| 5/2 pilot/pilot | | 034118 | A1P451 |
| 5/2 pilot/pilot differential | | 034136 | A1P452 |
| 5/3 with closed centres | | 034129 | A1P470 |
| 5/3 with open centres | | 034130 | A1P471 |
| 5/3 with pressurised centres | | 034135 | A1P472 |



Series of spool valves, with static seals, high flow, for panel mounting.

Code key


| Series | Actuation | Size | Function | | |
|--------|---------------|----------------------------------|-----------------------------------|--|-----------------------------------|
| A1 | P = pneumatic | 1 = 1/8" 2 = 1/4" 4 = 1/2" | 30 = 3/2 NC | | |
| | | | 31 = 3/2 NO | | |
| | | | 32 = 3/2 pilot/pilot | | |
| | | | 33 = 3/2 pilot/pilot differential | | |
| | | | | | 50 = 5/2 pilot/spring |
| | | | | | 51 = 5/2 pilot/pilot |
| | | | | | 52 = 5/2 pilot/pilot differential |
| | | | | | 70 = 5/3 CC |
| | | | | | 71 = 5/3 CO |
| | | | | | 72 = 5/3 CP |




II 2Gc IIC T5
II 2Dc T100°C

On request, they can be supplied according to 94/9/EC - **ATEX**

| Technical data | | | |
|---------------------------|--|--|----------------------|
| Fluid | Compressed filtered air with or without lubrication. Lubrication, if started, must be continued. | | |
| Pressure range | 0 ÷ 10 bar | | |
| Temperature range | -10°C ÷ +60°C | | |
| Orifice | 15 mm | | |
| Flow | 2900 NI/min at 6 bar with ΔP 1 bar | | |
| Minimum piloting pressure | Monostable: 2,5 bar | Bistable: 1 bar | 3 positions: 2,5 bar |
| Mounting | In any position | | |
| Manual override | Bistable on solenoid pilot - Monostable on valve body | | |
| Materials | Body: | Anodised aluminium | |
| | Covers: | Anodised aluminium | |
| | Spool: | Hard aluminium anodized | |
| | Distancers: | Aluminium | |
| | Seals: | Hydrogenated Nitrile Butadiene Rubber (HNBR) | |

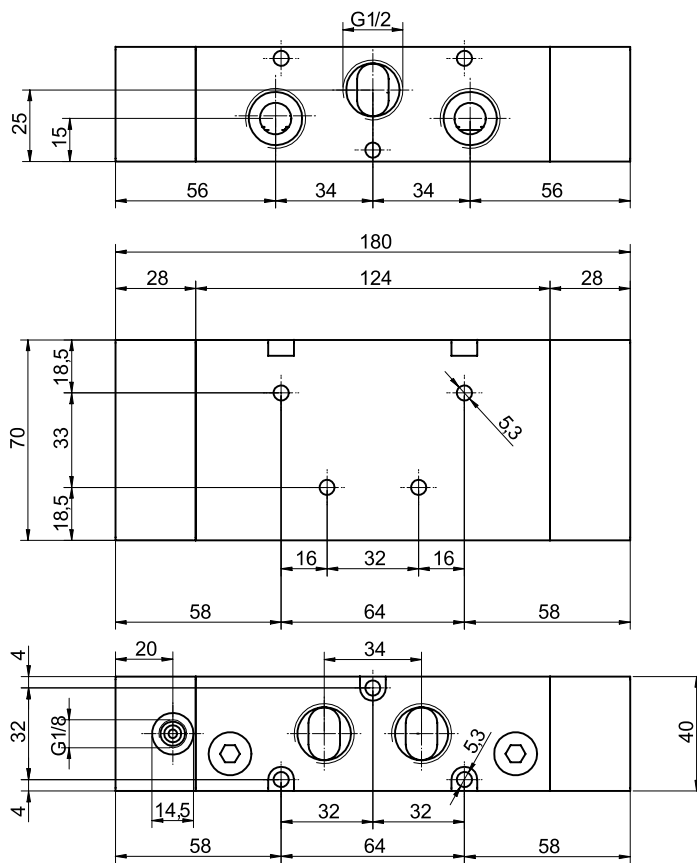

| Version | Symbol | Code | Item |
|-------------------------|--------|--------|--------|
| 5/2 solenoid/ spring | | 034117 | A1P450 |

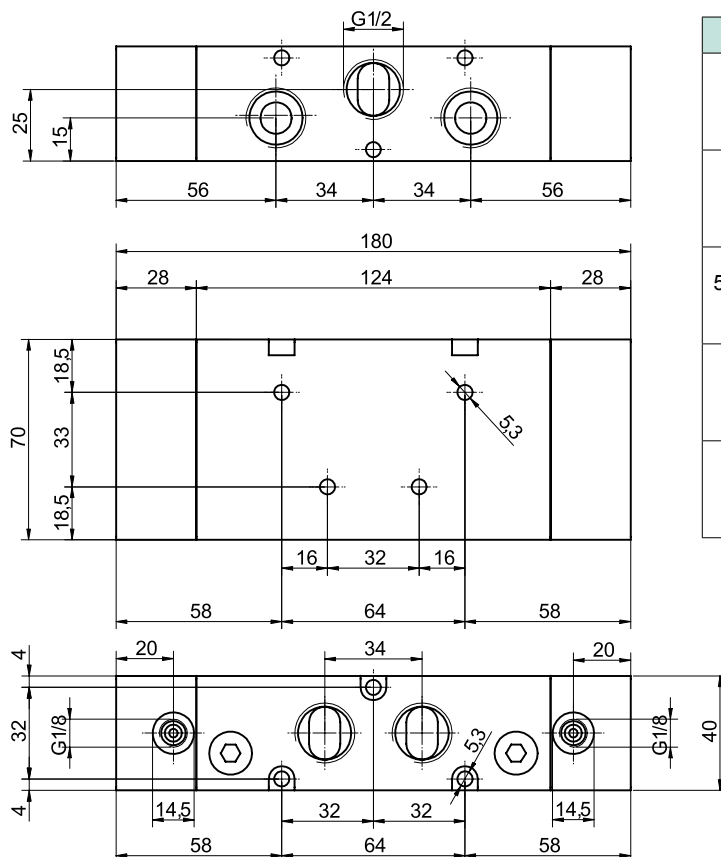

| Version | Symbol | Code | Item |
|---|--------|--------|--------|
| 5/2 solenoid/ solenoid | | 034118 | A1P451 |
| 5/2 solenoid/ solenoid differential | | 034136 | A1P452 |
| 5/3 with closed centres | | 034129 | A1P470 |
| 5/3 with open centres | | 034130 | A1P471 |
| 5/3 with pressurised centres | | 034135 | A1P472 |