


## Specifications

<b>Port Sizes</b>	1/4", 3/8", 1/2"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	60 scfm @ 100 PSI
<b>Filter Capacity</b>	3.0 Micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max Temp/ Pressure Aluminum Bowl</b>	175 °F/200 PSIG
<b>Max Temp/ Pressure Polycarbonate Bowl</b>	125 °F/150 PSIG
<b>Approx. Weight (lb.)</b>	3.5
<b>ISO Class</b>	3 Particulate

For higher pressure applications, consult factory.  
Units equipped with differential pressure indicator have max temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.




**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

## Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1P-060
<b>B</b> Differential Pressure Indicator	N32-W1-DPI
<b>B</b> Blanking Cap (Cover for Indicator)	N32-95-020
<b>C</b> Bowl Assembly: Metal Bowl, Manual Petcock Drain, & O-ring	N34-95-205
<b>C</b> Bowl Assembly: Metal Bowl, Auto Float Drain, & O-ring	N34-95-201
<b>C</b> Bowl Assembly: Poly Bowl & Manual Petcock Drain*	N32-15-163
<b>C</b> Bowl Assembly: Poly Bowl & Auto Float Drain*	N32-15-164
<b>D</b> Manual Petcock Drain	PC-02/PC-03
<b>E</b> Automatic Float Drain (Metal Bowl)	N32-95-979
<b>E</b> Automatic Brass Float Drain (Poly Bowl)	N32-95-978
<b>F</b> Bowl O-ring	N32-95-257

\*Poly bowls come with metal bowl guard

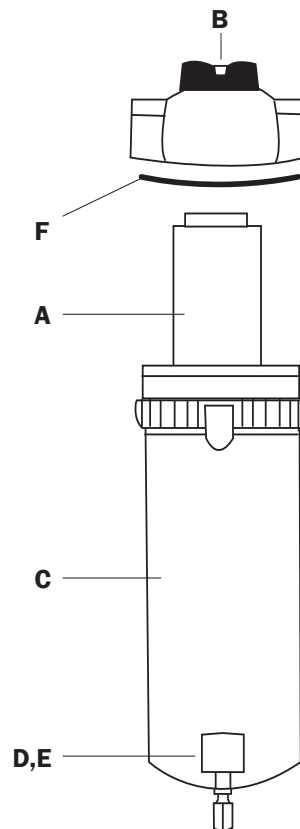

## Order Guide

	Port Size	Model Number	
		Metal Bowl	Poly Bowl
<b>Manual Brass Petcock Drain</b>	1/4"	1P-060-M02-P	1P-060-P02-P
	3/8"	1P-060-M03-P	1P-060-P03-P
	1/2"	1P-060-M04-P	1P-060-P04-P

<b>Automatic Float Drain</b>	1/4"	1P-060-M02-F	1P-060-P02-F
	3/8"	1P-060-M03-F	1P-060-P03-F
	1/2"	1P-060-M04-F	1P-060-P04-F

Dimensions (inches)			
Height*		Width	Depth
Metal	Poly		
10.0	10.0	3.9	3.9
10.0	10.0	3.9	3.9
10.0	10.0	3.9	3.9

10.0	10.5	3.9	3.9
10.0	10.5	3.9	3.9
10.0	10.5	3.9	3.9

\*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)



# 120/175/250 scfm Eliminex®

## Specifications

<b>Port Sizes</b>	1/2", 3/4", 1"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	120/175/250 scfm @ 100 PSI
<b>Filter Capacity</b>	3.0 Micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max Temp/ Pressure</b>	
<b>Aluminum Bowl</b>	175 °F/200 PSIG
<b>Max Temp/ Pressure</b>	
<b>Polycarbonate Bowl</b>	125 °F/150 PSIG
<b>Approx. Weight (lb.)</b>	6.0
<b>ISO Class</b>	3 Particulate

For higher pressure applications, consult factory.  
Units equipped with differential pressure indicator have max temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.




	Dimensions ( inches )			
	Height*		Width	Depth
	Metal	Poly		
Manual Brass Petcock Drain	17.0	14.0	4.6	4.8
Automatic Float Drain	17.0	14.5	4.6	4.8

**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

## Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1P-120/1P-175/1P-250
<b>B</b> Differential Pressure Indicator	N32-W1-DPI
<b>B</b> Blanking Cap (Cover for Indicator)	N32-95-020
<b>C</b> Bowl Assembly: Metal Bowl, Manual Petcock Drain, & O-ring	N34-15-180
<b>C</b> Bowl Assembly: Metal Bowl, Auto Float Drain & O-ring	N34-15-178
<b>C</b> Bowl Assembly: Poly Bowl, Manual Petcock Drain, & O-ring*	N32-15-167
<b>C</b> Bowl Assembly: Poly Bowl, Auto Float Drain & O-ring*	N32-15-166
<b>D</b> Manual Petcock Drain	PC-03
<b>E</b> Automatic Float Drain (Metal Bowl)	N32-95-979
<b>E</b> Automatic Brass Float Drain (Poly Bowl)	N32-95-978
<b>F</b> Bowl O-ring	N32-95-256

\*Poly bowls come with metal bowl guard

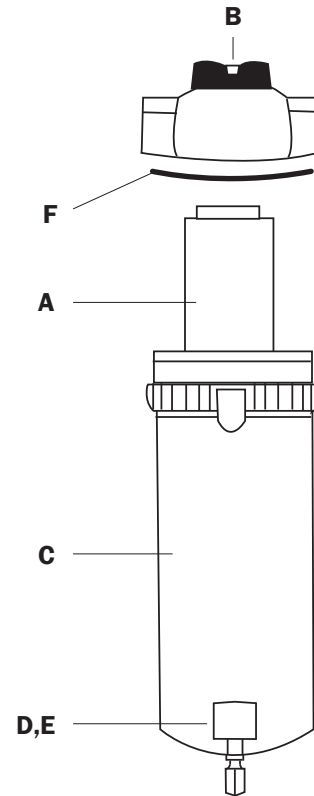

## Order Guide

	Port Size	Model Number					
		Metal Bowl			Poly Bowl		
		Low Flow	Med Flow	High Flow	Low Flow	Med Flow	High Flow
<b>Manual Brass Petcock Drain</b>	1/2"	1P-120-M04-P	1P-175-M04-P	1P-250-M04-P	1P-120-P04-P	1P-175-P04-P	1P-250-P04-P
	3/4"	1P-120-M06-P	1P-175-M06-P	1P-250-M06-P	1P-120-P06-P	1P-175-P06-P	1P-250-P06-P
	1"	1P-120-M08-P	1P-175-M08-P	1P-250-M08-P	1P-120-P08-P	1P-175-P08-P	1P-250-P08-P
<b>Automatic Float Drain</b>	1/2"	1P-120-M04-F	1P-175-M04-F	1P-250-M04-F	1P-120-P04-F	1P-175-P04-F	1P-250-P04-F
	3/4"	1P-120-M06-F	1P-175-M06-F	1P-250-M06-F	1P-120-P06-F	1P-175-P06-F	1P-250-P06-F
	1"	1P-120-M08-F	1P-175-M08-F	1P-250-M08-F	1P-120-P08-F	1P-175-P08-F	1P-250-P08-F

\*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)




## Specifications

<b>Port Sizes</b>	1¼", 1½", 2"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	300/400/700 scfm @ 100 PSI
<b>Filter Capacity</b>	3.0 Micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max Temp/ Pressure</b>	
<b>Aluminum Bowl</b>	175 °F/200 PSIG
<b>Approx. Weight (lb.)</b>	30.0
<b>ISO Class</b>	3 Particulate

For higher pressure applications, consult factory.  
 Units equipped with differential pressure indicator have max temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.




**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

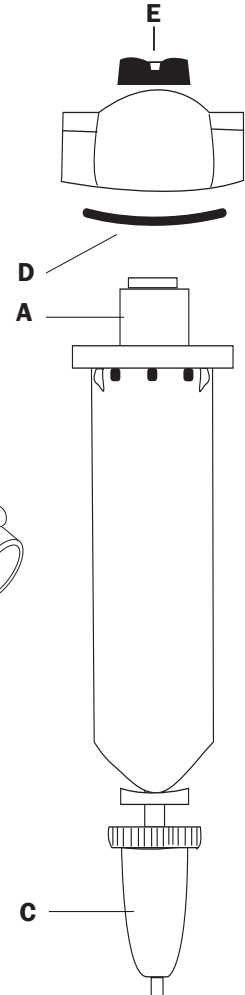

## Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1M-300/1M-400/1M-700
<b>B</b> Manual Drain, Ball Valve	BV-051
<b>C</b> Automatic Float Drain	N32-95-XD8
<b>D</b> Bowl O-ring	N32-F35-OR
<b>E</b> Differential Pressure Indicator (Optional)	N32-W1-DPI



## Order Guide

	Port Size	Model Number			Dimensions (inches)		
		Low Flow	Med Flow	High Flow	Height*	Width	Depth
<b>Manual Brass Petcock Drain</b>	1¼"	1M-300-M10-P	1M-400-M10-P	1M-700-M10-P	28.0	7.8	7.8
	1½"	1M-300-M12-P	1M-400-M12-P	1M-700-M12-P	28.0	7.8	7.8
	2"	1M-300-M16-P	1M-400-M16-P	1M-700-M16-P	28.0	7.8	7.8
<b>External Automatic Float Drain</b>	1¼"	1M-300-M10-F	1M-400-M10-F	1M-700-M10-F	32.0	7.8	7.8
	1½"	1M-300-M12-F	1M-400-M12-F	1M-700-M12-F	32.0	7.8	7.8
	2"	1M-300-M16-F	1M-400-M16-F	1M-700-M16-F	32.0	7.8	7.8

\*To add an indicator, add "I" to end of model number (Indicator adds about 1" to height)



# 1200 scfm Eliminx®

## Specifications

<b>Port Sizes</b>	3"
<b>Thread Styles</b>	NPT
<b>Flow Capacity</b>	1200 scfm @ 100 PSI
<b>Filter Capacity</b>	3.0 Micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max Temp/ Pressure</b>	
<b>Aluminum Bowl</b>	175° F/200 PSIG (manual drain) 175° F/150 PSIG (float drain)
<b>Approx. Weight (lb.)</b>	38.0
<b>ISO Class</b>	3 Particulate


For higher pressure units, consult factory.



**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

## Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1M-1200
<b>B</b> Manual Drain, Ball Valve	BV-051
<b>C</b> Automatic Float Drain	N32-95-XD8
<b>D</b> Bowl O-ring	PHC-032

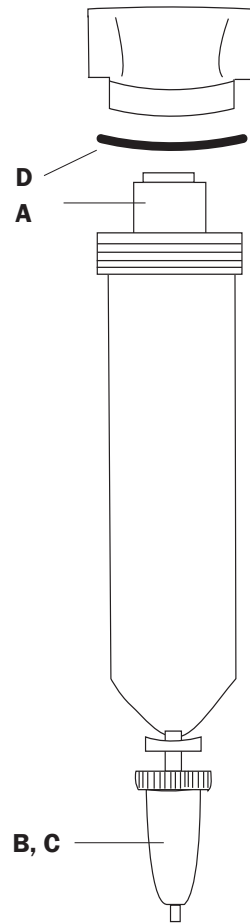

## Order Guide


	Port Size	Model Number	Dimensions (inches)		
			Height	Width	Depth
Manual Brass Petcock Drain	3"	1M-1200-M24-P	40.0	8.0	7.3
Automatic Float Drain	3"	1M-1200-M24-F	44.0	8.0	7.3



## Specifications

<b>Port Sizes</b>	3", 4", 6" RFSO
<b>Connection</b>	Raised face 150# Flange
<b>Flow Capacity</b>	2500/5500 scfm @ 100 PSI
<b>Filter Capacity</b>	3.0 Micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max Temp/ Pressure</b>	
<b>Epoxy Coated Carbon Steel</b>	150 °F/200 PSIG
<b>Approx. Weight (lb.)</b>	300/310/450
<b>ISO Class</b>	3 Particulate

For higher pressure applications, consult factory.  
 Units equipped with an external auto drain  
 have max temperature and pressure of 150 °F  
 and 150 PSIG.

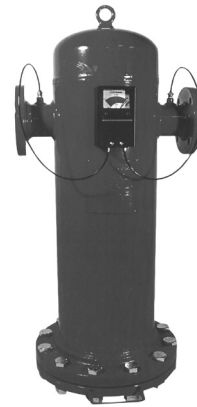


**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

## Replacement Parts & Accessories

Description	Part Number
<b>A</b> Differential Pressure Indicator	N32-P2-DPi
<b>B</b> External Float Drain	N32-95-XD8
Manual Drain, Ball Valve	BV-051
Replacement Element	1X-2500/1X-5500

Note:  
 All 1M-2500 units require a minimum of 25" clearance between  
 bottom of housing and floor for installation.  
 All 1M-5500 units require a minimum of 36" clearance between  
 bottom of housing and floor for installation.

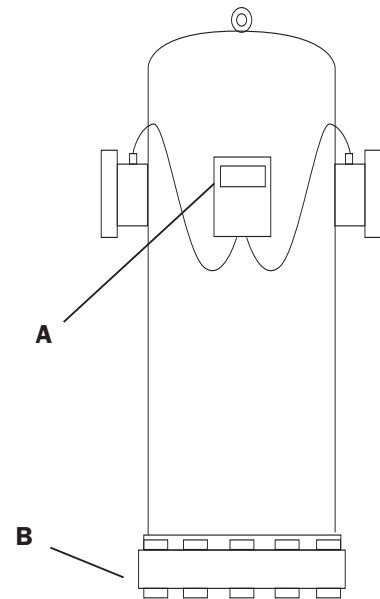

## Order Guide

	Port Size	Model Number (ASME Vessel)	Dimensions (inches)		
			Height	Width	Depth
<b>Manual Brass Petcock Drain</b>	3"	1M-2500-MFD-P	50.2	20.0	16.0
	4"	1M-2500-MFE-P	50.2	20.0	16.0
	6"	1M-5500-MFF-P	68.0	23.4	19.0
<b>Automatic Float Drain</b>	3"	1M-2500-MFD-X	54.2	20.0	16.0
	4"	1M-2500-MFE-X	54.2	20.0	16.0
	6"	1M-5500-MFF-X	72.0	23.4	19.0

Indicator is included as standard with these powder coated steel units.