

Product Data:-



Preface:

The Eclipse high intensity Underflow magnetic separator has been designed to operate in arduous conditions and where contamination size is relatively large e.g. nuts, bolts etc.

The unit incorporates two magnetic poles, which generate high intensity magnetic fields. The unit is secured to the chute via an integral hinge and toggle clamp arrangement. It is these toggle clamps that ensures even pressure is generated around the seal to eliminate any product leakage.

The Underflow magnet can be incorporated into any form of angled pipe or chute section. A common installation Location is raw material inlet points such as grain, rice, corn, bran and animal feed etc. Two catchment areas ensure that attracted contamination cannot be 'washed off'.

As the magnet is usually installed in angled chute sections any processed products of any size can be passed over the top of the magnet. Safety interlocks can be fitted to the magnet to stop the process should it be accidentally opened.

Cleaning:

Underflow magnets are very easy to clean. Simply release the two securing toggle clamps and allow the magnet to swing away under its own weight, this will give access to the magnetic face.

All attracted contamination can now be removed by a gloved hand or scraper tool.

Suitable Products:

Dry and semi dry powders, granulates and lumps etc.

Suitable Locations:

All angled chute sections.

Benefits:


Easy to clean ■ Maintains full flow ■ High collection capacity ■ Reduces 'spark' risk ■ Removes 'tramp' sized contaminants ■ Meet audit requirements ■ Rare Earth deep magnetic field ■

Category:

Primary.



Technical Data:-

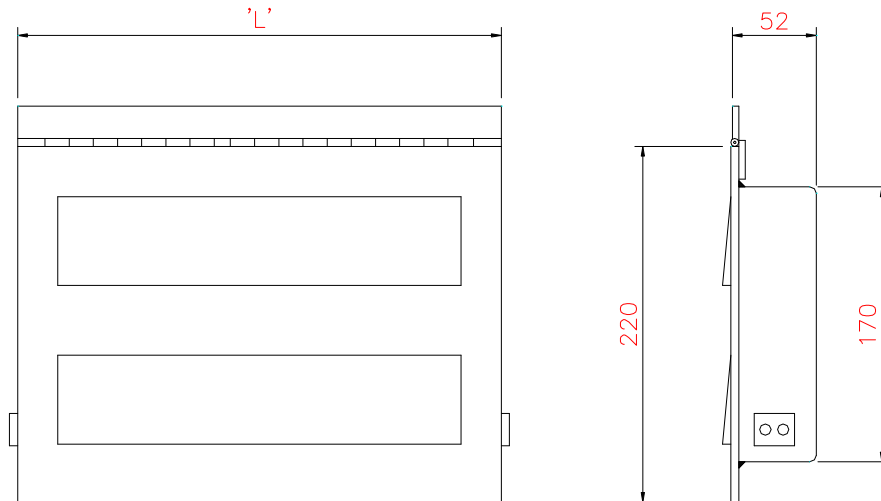

Sizes:-

Part No	Length L (mm / ")	Weight Kgs
UFM200	200 / 8"	10
UFM250	250 / 10"	13
UFM300	300 / 12"	15
UFM350	350 / 14"	17
UFM400	400 / 16"	20
UFM450	450 / 18"	23
UFM500	500 / 20"	27

Performance:-

Magnetic Performance:	3,500 Gauss
Performance Reading:	On magnetic front face surface
Magnetic Material:	Rare Earth Neodymium Iron Boron
Magnet Grade:	N35 – Inspected & confirmed via hystergaph prior to use
Temperature:	-20° C/ + 90° C

Materials:-

Housing:	316 Grade Stainless Steel
Other Parts:	316 Grade Stainless Steel
Surface Finish:	Brushed finish
Hinge:	304 Grade Stainless Steel
Toggle Clamps:	Zinc plated Mild Steel

Options:-

High temperature Samarium Cobalt magnetic material, + 250° C
 Sizes up to 2000mm long
 304 Grade Stainless Steel
 ATEX certified
 Ceramic magnetic material
 Pharmaceutical specification
 Stainless Steel toggle clamps

102008-Issue 1

Copyright Eclipse Magnetics 2008

